


An intricate steel and glass waterfall highlights
the new North American headquarters of a global education company.



International WATERS

BY ALAN H. SIMON, S.E. P.E.,
AND RACHEL M. GERHART

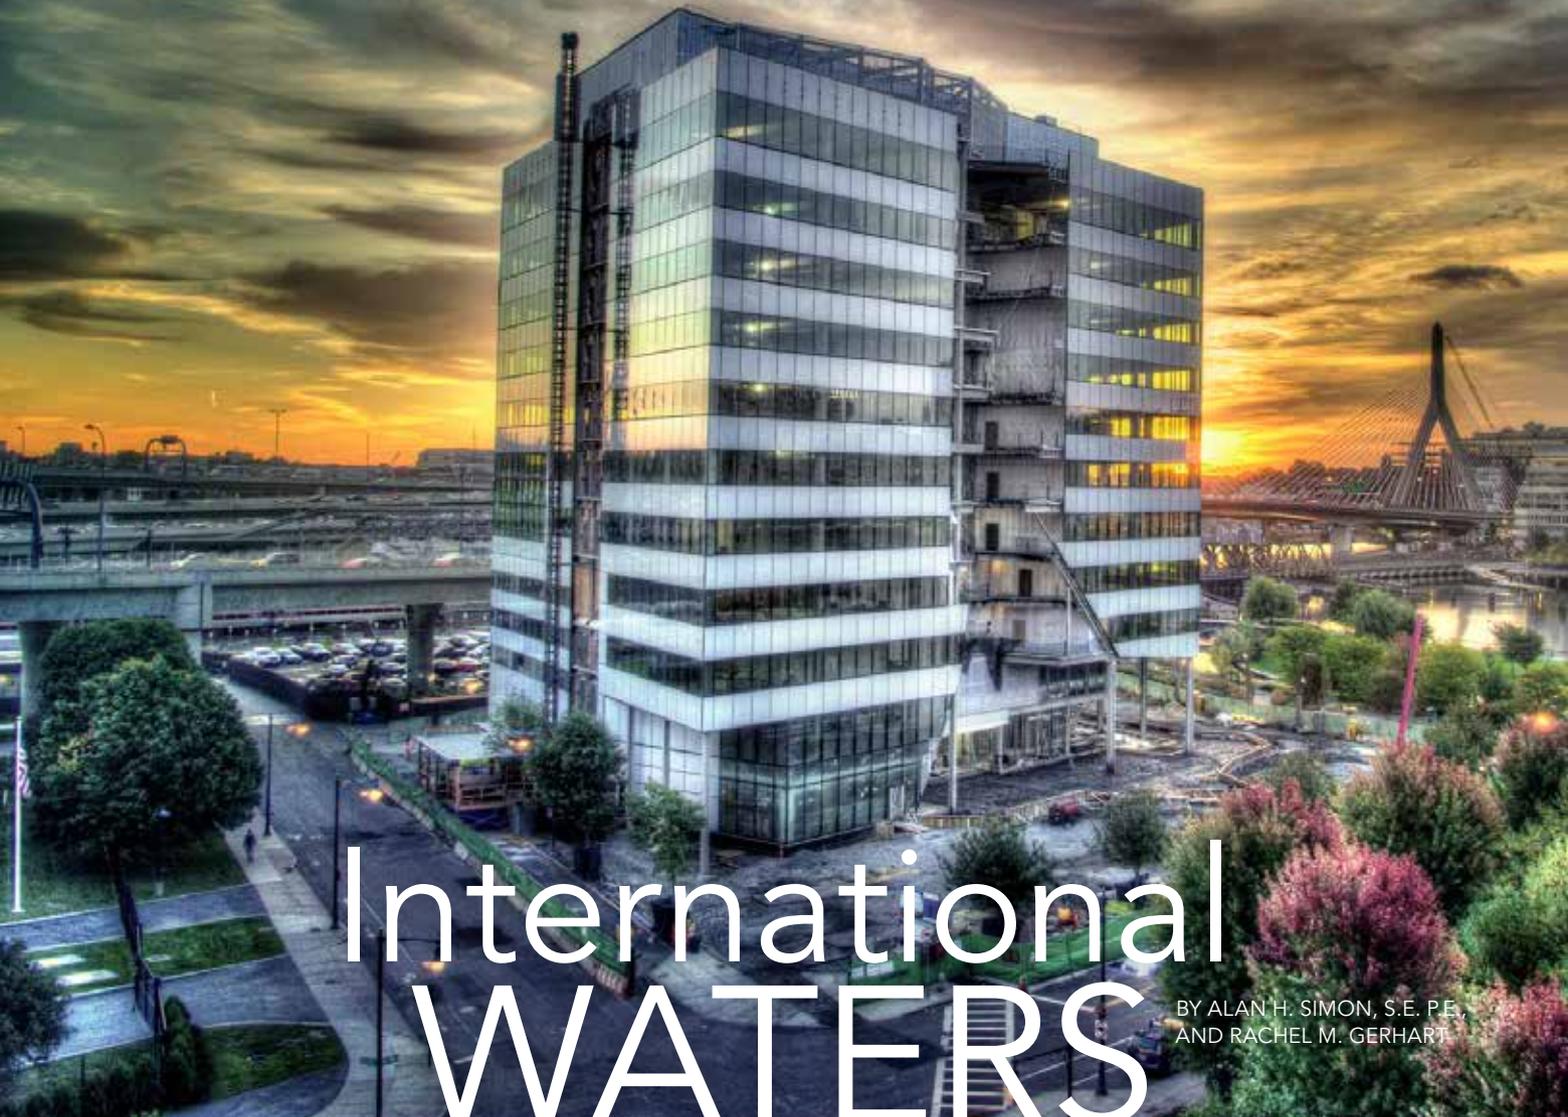

Alan Simon (asimon@sde-us.com) is a principal and **Rachel Gerhart** (rgerhart@sde-us.com) is a junior engineer, both with Simon Design Engineering in Wellesley, Mass.

TO DESCRIBE EF EDUCATION FIRST as worldly would be an understatement.

The company, which turns 50 this year, specializes in language training, educational travel, academic degree programs and cultural exchange, and has 37,000 staff and 500 offices and schools located in more than 50 countries.

And it just unveiled its new \$125 million, 12-story North American headquarters facility in Cambridge, Mass., this past fall. The 300,000 sq.-ft building, one of the largest entirely open-plan workspaces in Massachusetts, is designed to capitalize on the facility's 360° views of Greater Boston and uses nearly 4,000 tons of steel. The panoramic views and open, flexible work spaces—as well as the glass and steel “waterfall” entrance—are intended to inspire collaboration and creativity among the EF team members.


EF wanted the new facility—whose address is, appropriately, 8 Education Street—to be more than just a company headquar-



▲ ▶ Visitors enter EF Education First's new 300,000-sq.-ft North American headquarters via a glass and steel "waterfall."

ters. The structure needed to fulfill multiple purposes, including public access to more than 31,000 sq. ft of space on the both the ground and mezzanine floors; a 14,000-sq.-ft restaurant with outdoor seating; staff amenities including a Hubway Station (Boston's shared-bike program), private showers and a salon.

The geometric extruded parallelogram-shaped structure includes up to 16 different flexible workspaces on each of the seven office levels. Each level above the main floor uses a raised-floor system throughout, allowing for more rea-

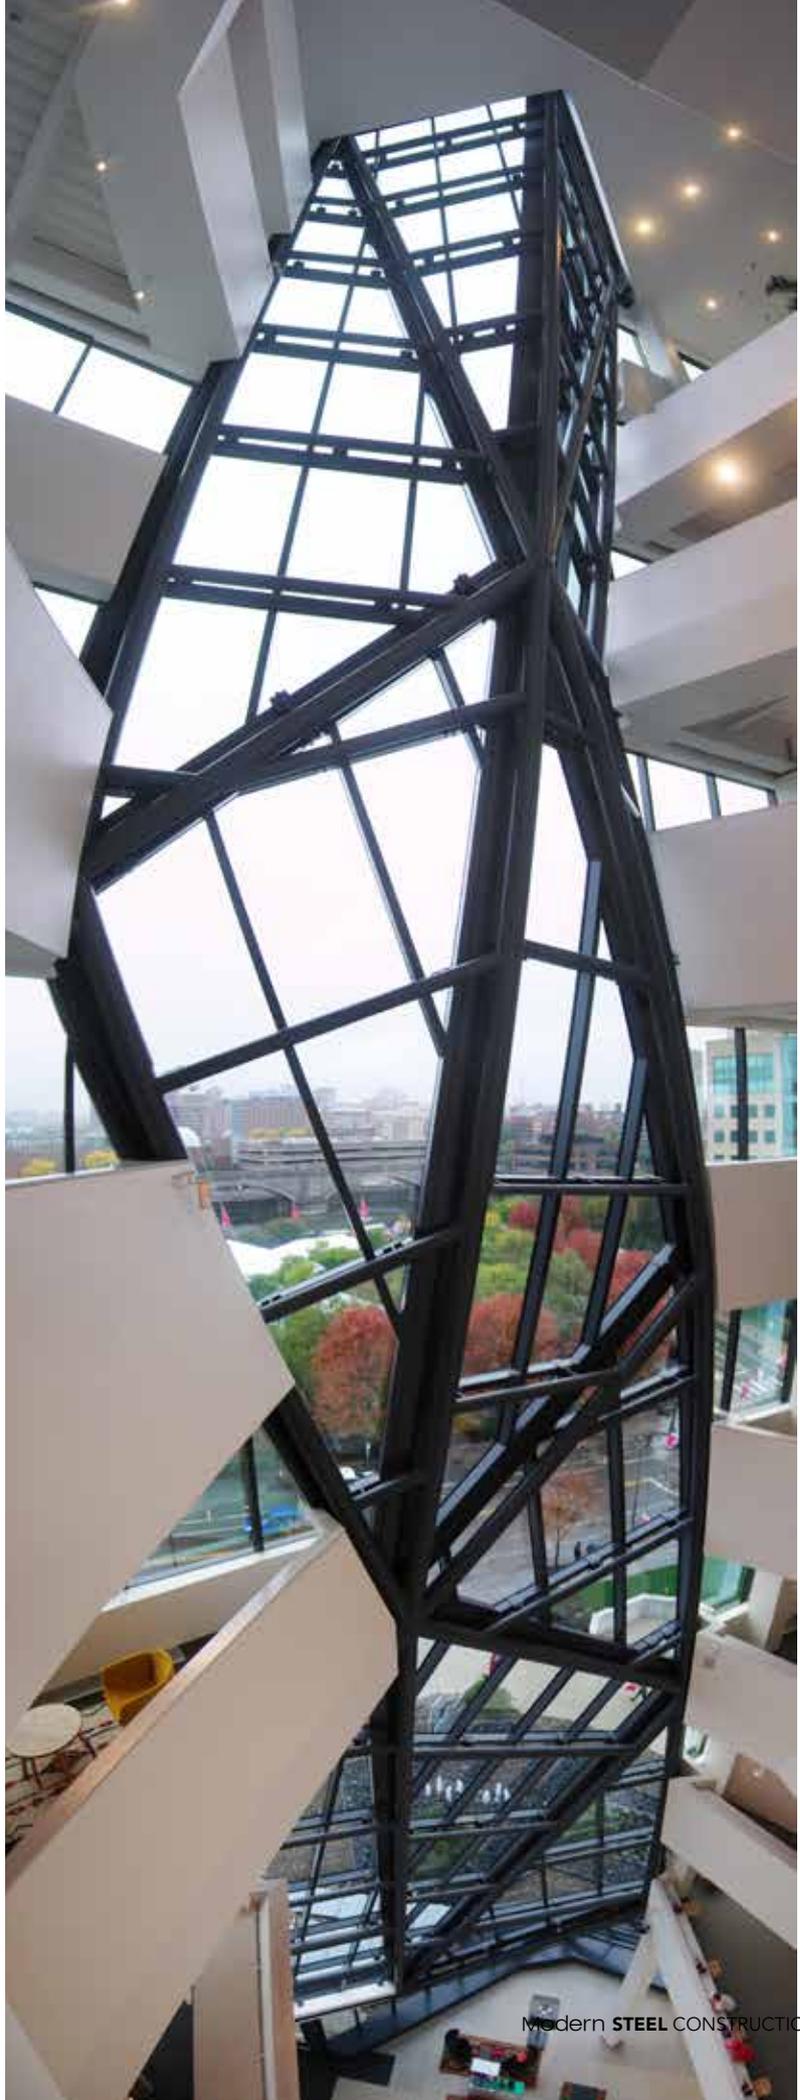



◀ An inside look at one of the waterfall node castings (left) and connecting a node to five round HSS (right). A combination of fillet and partial-penetration welds were used to complete the connections at each steel node casting.



sonable floor tolerances and larger open spans, ranging up to 45 ft, with exposed ceilings. In addition, the three lower levels incorporate an enclosed parking garage in the back of the building with office and atrium space in the front. Originally, the garage was designed as a cast-in-place, post-tensioned slab system but was changed to steel to accelerate the schedule and to align the garage framing with that of the building's steel superstructure. As a result, this eliminated the once-needed, heavy transfer girders at the lower parking levels and allowed for moment frames to be converted to braced frames. By changing the garage to steel framing, a total of six months was saved on the overall schedule, allowing EF's owner, Bertil Hult, to fulfill its commitment to the State to occupy the building by the fall of 2014.

The change to braced frames also eliminated a more than 4-psf dead load over the entire building's framing system as well as several time-consuming moment connections. EF also challenged the team to eliminate a pesky column in front of the main entrance, and in the pathway to the elevators, to keep the desired unobstructed, open

◀ One of the complex nodes of the waterfall.

**YOUR
ENGINEERING
CONNECTION**

BROWN

Consulting Services, Inc.
Phone: 281-288-9749 Fax: 281-288-8771

**Experienced
Professional Engineers
Registered Nationwide!**

- Structural Steel Connection Design
- Stair and Railing Design
- Shop Drawing Review and Supervision
- Design Build Services
- Construction Dispute Resolution

**SPECIALIZING IN CUSTOM
STEEL CONNECTION DESIGN**

steelconnectiondesign.com

BOOTH #1046

**THE PROVEN
STEEL BRIDGE
DESIGN SOLUTION**

**FREE
15-DAY
TRIAL***

See website
for details

The leading software package for designing and rating curved and straight steel girder bridges for compliance with AASHTO ASD, LFD, & LFRD specifications.

Tel: (573) 448-3221 | info@mdxsoftware.com | www.mdxsoftware.com

- Erection of the waterfall, which uses 100 tons of structural steel and spans the full height of the building.

feel. By using the shape of the building, two columns were merged at the base level into a single 30-ft-tall W14x455 column, which was then offset to a more desirable position and “hidden” in the waterfall. This column branches into a tree column and acts as an inverted truss between levels two and four to support the columns above level four, which remained in their original locations.

Flowing Façade

The building’s most striking feature, and most significant design accomplishment, is the waterfall window structure cascading down the façade of the full 150-ft building height—a centerpiece that reflects the facility’s close proximity to the Charles River. The glass forming the waterfall protrudes in and out of the building and changes geometry at every level. The waterfall’s architectural consultant, Wingardh Arkitektkontor AB of Sweden, collaborated with architect of record Wilson Architects on developing this feature into a curtain wall skin supported by an exposed structural steel frame, which was designed by Simon Design Engineering (SDE).

- The waterfall itself was made and erected to AESS standards and cleaned to the requirements of the SSPC-SP 6/ NACE No. 3, *Commercial Blast Cleaning* standard; two coats of Tnemec Paint were applied.



BENT ON SATISFACTION

11 Bending Machines

Easyway and Hardway: Beams, Tubes, Angles, Tees, Channels, Flats, Pipe & Rail

Sheet/Plate

Shearing (to 1/2" x 20'), Forming, Rolling (to 1 1/4"), and Coning

6 Press Brakes

1000 Ton x 30'	750 Ton x 24'
400 Ton x 23'	3-225 Ton x (10', 12', 14')

CNC Machining

Quality

WhiteFab's patented structural bending process minimizes deformation and provides smoother curvatures. Each bent section is verified for accuracy along its arc.

Facilities

170,000 sq. ft. of production area, under roof

**"IF QUALITY IS WHAT YOU NEED,
LET WHITEFAB TAKE THE LEAD"**



Phone 205-791-2011
Fax 205-791-0500
E-mail: sales@whitefab.com
Web: www.whitefab.com



◀ Twelve connection points were used to attach the waterfall frame to the building structure.

The team's approach was to create a self-supporting ladder frame for the waterfall, which would lean against the building. The frame itself was made and erected to AESS standards and cleaned to the requirements of the SSPC-SP 6/NACE No. 3, *Commercial Blast Cleaning* standard with two coats of Tnemec paint applied. Wilson Architects and SDE collaborated on the expression of the structural form, from the aesthetic impacts of connective nodes and exposed curtain wall anchors to the placement hierarchy of the ladder frame members. All framing members are HSS round sections of varying wall thicknesses; in some instances up to 1 1/8-in.-thick material was sourced to maintain the desired aesthetic. A total of 100 tons of steel were used to create the waterfall.

The analysis of the waterfall frame needed to account for the relative differential movements, both laterally and vertically, of the building frame. Because of its truss-like geometry, care had to be taken in developing releases to assure the waterfall did not end up bracing the building and causing damage to the façade or the waterfall glazing. Twelve connection points were used to attach the waterfall frame to the building structure, eight of which use a custom piston-type slide connection that attaches to the building steel and reaches out to accept the waterfall while allowing for vertical and lateral movement in one direction. Four other slide bearing plate connections provide vertical support but allow lateral movement in both directions.

The waterfall frame's fabricator, Newport Industrial Fabrication, introduced the idea of steel castings for the nodes, as all the connections for the waterfall are exposed. A preliminary design ensued and after a few trials, a node connection was successfully developed resulting in the use of eight spherical steel castings of 12 3/4-in. nominal outside diameter with 1 1/2-in. wall thickness made from grade-50 steel and machined to ±0.03-in. tolerances. The castings were carefully located to retain the desired aesthetic while remaining structurally sound and cost-effective. In addition, the entire system was modeled to accommodate wind and ice development, and a snow-melt system, including gutters, was incorporated into the waterfall design. The gutters are directly supported by the waterfall framing and are integrated into the



THE MOST ADVANCED ROBOTIC PLASMA CUTTING SYSTEM

PCR42

- ◀ Webcam system that speeds up the remote support
- ◀ Low maintenance and robust construction
- ◀ Small footprint, lay-out versatility
- ◀ Non-contact measuring system
- ◀ **NEW!** Round tubes processing
- ◀ Cuts all features on all 4 faces
 - ◀ 5 years warranty
 - ◀ Fast delivery

Watch it on 



Ask about our **NEW** cutting system the **PCR31**

Info@prodevcoind.com | www.prodevcoind.com | 1 866 876-4480

Visit us Booth #434

Make Greiner your job shop for custom rolling and forming.



Rolling a 7' plate of 7052 on an 8000
Treadplate on a 1-7/8" thick 40" dia 10' dia
diameter with 3-degree roll.



Rolling a 1-7/8" thick 40" dia 10' dia 10' dia
100' dia 10' dia 100' dia structural
ALUM 6061 cone.

Capacity. Precision. Efficiency.

Greiner's new Plate Roll makes it look easy when it comes to rolling cones.

- 24-inch top roll
- 10-foot rolling capacity
- Up to 2.5-inch thick steel plate
- Full cone sections
- Specialize in aluminum cone rolling
(no press brake lines)

Greiner's arsenal of rolling & forming machines can handle all types of custom cone, plate and sectional rolling. Put us to the test!

Call us at 800-782-2110 for a free quote.
www.greinerindustries.com



GREINER
INDUSTRIES

- Structural Steel Fabrication
- Steel Plate & Sheet Metal Fabrication
- Miscellaneous Metals
- Machining
- Rolling & Forming Services
- Cutting Services
- Industrial Coatings
- Industrial & Electrical Contracting
- Crane Rental & Trucking Services
- Heat-Treating Services
(ASCE Certified for Major Steel Bridge Fabrication)

Hypertherm plasma cutting technology.
For those who dream in large.

Visit us at IA 500 booth 515



Hypertherm. America. Always. There's only one way to build with Hypertherm plasma cutting technology. It's just completely different. Adding Hypertherm plasma cutting technology to the job is a sure-fire winning system because it means productivity and it adds up to 50% of material handling, power consumption and emissions — all with a smaller carbon footprint than any other plasma cutting technology. Visit us at IA 500 booth 515 and always let us give you the best deal for your next project.

Call 800-762-4663 for more information or visit us at
www.hypertherm.com

Hypertherm
Set with confidence

PLASMA | LASER | WATERJET | AIRBORNE | SOFTWARE | CONSUMABLES

glazing along designated facet edges to maintain the clean look of the waterfall.

The biggest challenge with the waterfall connections was interpreting the forces at each node and determining the best way to normalize the forces for an analysis. In the end, a finite element model of the waterfall frame was constructed and the forces were resolved by hand for connection design. Each node required its own unique analysis to determine member prioritization and detailing for joining of the HSS members. Full-penetration welds at the connections were avoided due to the increased cost and also to minimize distortions; combinations of fillet and partial-penetration welds were used to complete the connections at each steel node casting.

Testing a Waterfall

Newport Industrial fabricated and welded each node in an arbitrary, accessible orientation, then arranged adjacent fabricated nodes in a second mocked-up position. Once this second position was established, Newport installed 330 one-off curtain wall attachment anchors. The unique 3D geometry of the spaceframe and each attachment anchor was developed from the fabrication model, transferred to an adapted survey instrument (a total positioning system or TPS), then used to lay out and build each step of the fabrication. This as-built information was later transmitted to the field, providing direction and troubleshooting, to ensure that the nodes and members were installed perfectly. The perim-

eter of the waterfall was sealed to the building with an expansion joint to create water-tightness as well as provide a thermal break.

A cantilever stair connects all levels of the atrium and provides a central causeway for truly interconnected spaces that facilitate communication throughout the company. This spirit of collaboration was echoed in the building's design and construction, resulting in a truly unique structure that has helped to revitalize Cambridge's North Point neighborhood and provides a world organization like EF with a world-class base for its North American operations. ■

Owner

EF Education First

Design-Builder

Skanska USA

Architect

Wilson Architects, Inc.

Design Architect (Waterfall)

Wingardh Arkitektkontor AB

Structural Engineer

Simon Design Engineering, LLC

Steel Fabricators

United Steel, East Hartford, Conn. – Building (AISC Member/Certified)

Newport Industrial Fabrication, Newport, Maine – Waterfall (AISC Member/Certified)

NEW PRODUCT

Lindapter USA

Type AAF Girder Clamp

This unique 'all-in-one' adjustable steel clamp offers high slip resistance capability, ease of installation, anti-corrosion protection and performance, even in low temperature environments.

- ✓ No drilling or welding required
- ✓ Faster installation & reduced costs
- ✓ High slip resistance capacities
- ✓ Independently approved SWL
- ✓ Low temperature SG iron

Innovative 2-part design allows the clamp to self-adjust to suit a range of flange thicknesses.

Est. 1934
Lindapter
Accept no substitutes
and Hello Boy

AISC ASSOCIATE

Find us @ NASCC 2015 March 25-27 Booth #520

Meet Lindapter's Engineers at NASCC 2015 in Nashville, Tennessee and watch live product demonstrations.